

# *Raptor* **Series**



**Your satisfaction is important to us, please let us help!**

If you have any questions or concerns during the installation, our support representatives are available to assist you.

Please call: 1-877-769-3765 or Live Chat at [www.raptorseries.com](http://www.raptorseries.com)

If you have damaged or missing parts please contact the company you purchased the product from and notify them of the issue right away.



**CAUTION: Do not install damaged parts!!!**

# Raptor Series

## Easy Return / Easy Exchange

---

### **Want to return an item or exchange? Not satisfied with purchase?**

No problem. We strongly believe in service after the sale and we stand behind our products and our service to you, our valued customer. There is no problem we can't solve for you!

Items that have been installed and/or damaged after receipt, are no longer in new and ready-to-sell condition and cannot be refunded, replaced or exchanged unless it has a manufacturer defect or was damaged in shipping. In addition, we cannot accept return on items that are not in the original packaging. Items returned in poor condition or having parts missing will not be credited.

**Please note: Your request for return or replacement must be initiated within 30 days of delivery of your merchandise.**

### **Did your order arrive damaged?**

Please do not install damaged products. Contact the company you purchased your product from as soon as possible and notify them of the damages. They will make arrangements with you to assist with the problem.

### **Did you order the wrong part or receive the wrong item?**

Don't worry. From time to time human error can result in problems with ordering or shipping. Contact the company you purchased your product from as soon as you notice the error. Every company has their own policy on returning parts that have been ordered incorrectly or shipped incorrectly.

In the event that you need to ship your part back to return/exchange, please ship to the warehouse below:

**CYC Returns Warehouse  
2415 Cathy Lane  
Jasper, IN 47546**



## **Raptor Series Warranty**

### **LIMITED TEN (10) YEAR WARRANTY**

#### **For Powder Coated Steel Products**




CYC Engineering, Inc. guarantees the original purchaser of our products a limited ten (10) year warranty from the date of original purchase against manufacturer defects in materials, workmanship and finish under normal use. The step pads are covered under warranty for 1 year. This warranty does not include damage resulting from road hazards such as gravel or other debris, product misuse, improper installation, impairments from accidents, product modifications, product neglect or scratches during the life of the product. This limited ten year warranty applies only to new products and is limited to the repair or replacement of company's products. Warranty does not include costs of removal, installation, labor, inconvenience or consequential damages. Original purchaser must return defective merchandise along with the purchase receipt, to the original place of purchase.

### **LIMITED LIFETIME WARRANTY**

#### **For Stainless Steel Products**

CYC Engineering, Inc. guarantees the original purchaser of our products a limited lifetime warranty from the date of original purchase against manufacturer defects in materials, workmanship and finish under normal use. The step pads are covered under warranty for 1 year. This warranty does not include damage resulting from road hazards such as gravel or other debris, product misuse, improper installation, impairments from accidents, product modifications, product neglect or scratches during the life of the product. This limited lifetime warranty applies only to new products and is limited to the repair or replacement of company's products. Warranty does not include costs of removal, installation, labor, inconvenience or consequential damages. Original purchaser must return defective merchandise along with the purchase receipt, to the original place of purchase.

0104-0342

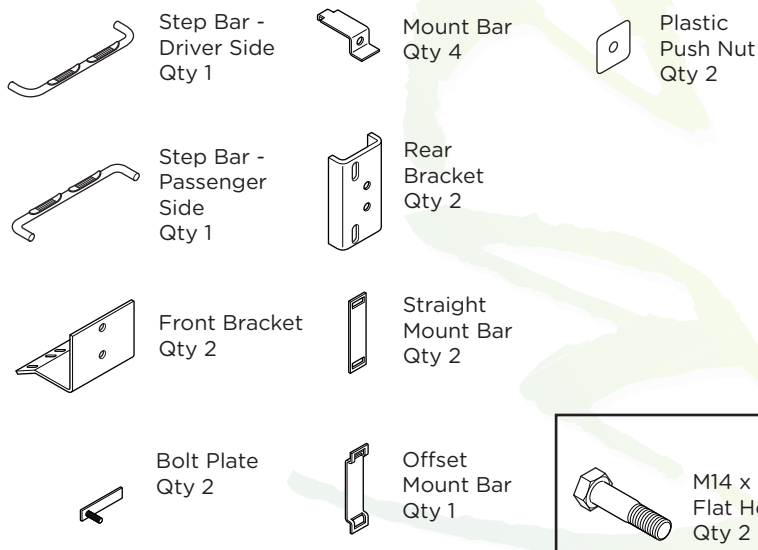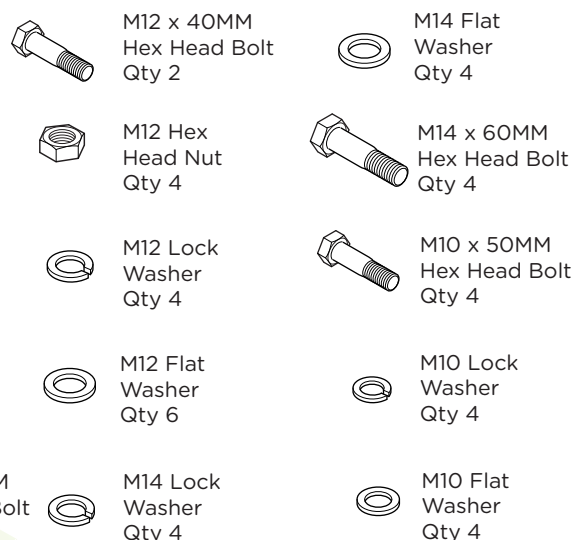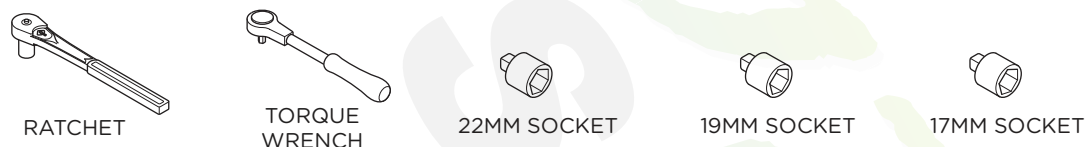**3" ROUND TUBE***Raptor*  
**Series****Components:****Hardware:****Tools Required:****Torque Specifications:**

For Frame Mount Installations


Frame mount bolts are torqued to 70 Ft Lbs. All other M8 through M12 sized bolts/nuts are set to 15-20 ft lbs.

**Note: When installing the brackets and bars, all hardware must be left loose until all the items are attached.**


**1.** Remove all contents from the package and check stainless steel tubes for any damage. Also, verify that all components and hardware listed above are included before you begin installation.

**2.** Read installation manual and installation drawing completely. Understand all brackets and bolts before installation.

**3.** Begin installation on the driver's side.

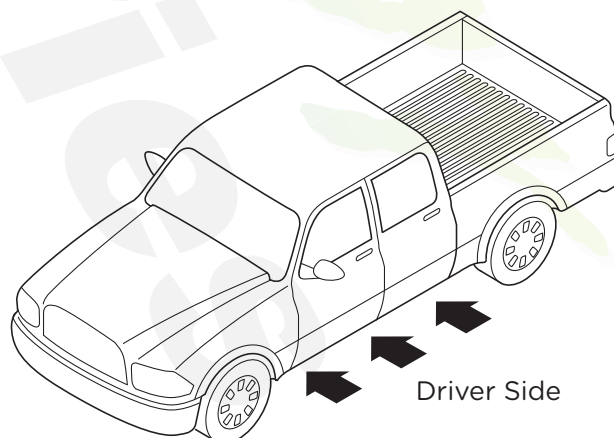

**4.** Insert the Bolt Plate into the Vehicle Frame (4a) and fasten with the Plastic Push nut to hold it into place (4c).

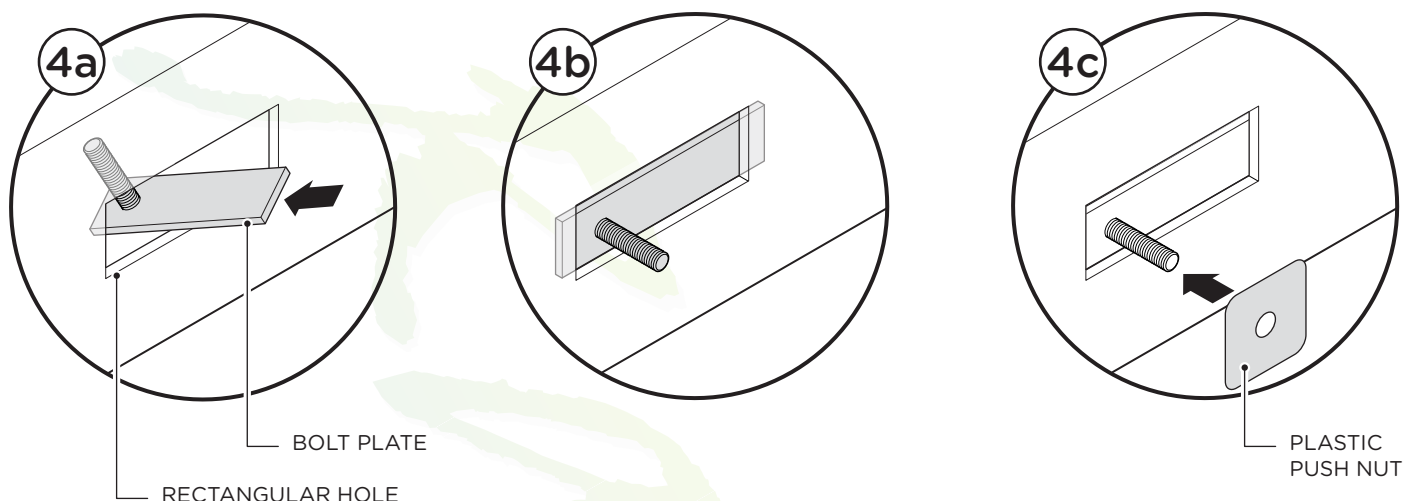


**5.** Assemble two (2) Mount Bars and Straight Rear Mount Bar to the vehicle frame as shown (5).


**NOTE:** For Regular Cab Models, place the Offset Mount Bar against the back side of the vehicle frame on the driver side so the recessed area of the bar clears the brake lines. Position the Straight Rear Mount Bar against the backside of the vehicle frame on the passenger side.

For 95'-98' Extended Cab Models, place the Offset Mount Bar against the back side of the vehicle frame on the passenger side and the Straight Rear Mount Bar on the driver side.


For 99' Extended Cab Models, use both of the Straight Rear Mount Bars supplied. **DO NOT USE THE OFFSET MOUNT BAR.** Hook the Mount Bars into the slots on the Straight Rear Mount Bar.

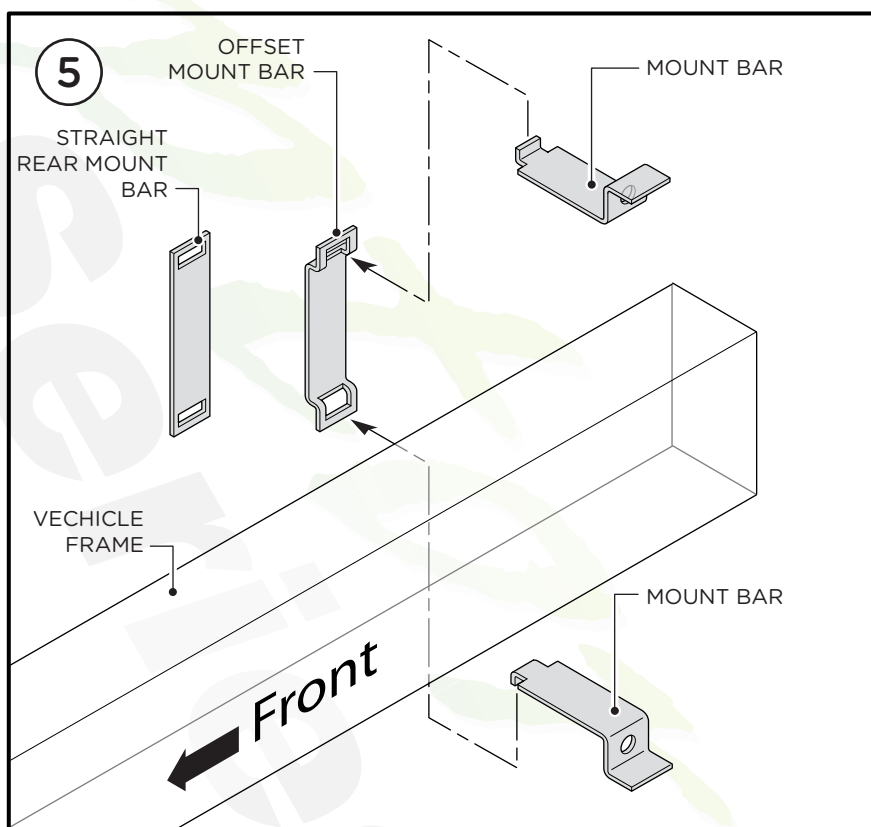

- 6.** Install the Front Bracket and the Rear Bracket to the Step Bar as shown. Leave loose until entire installation is complete.

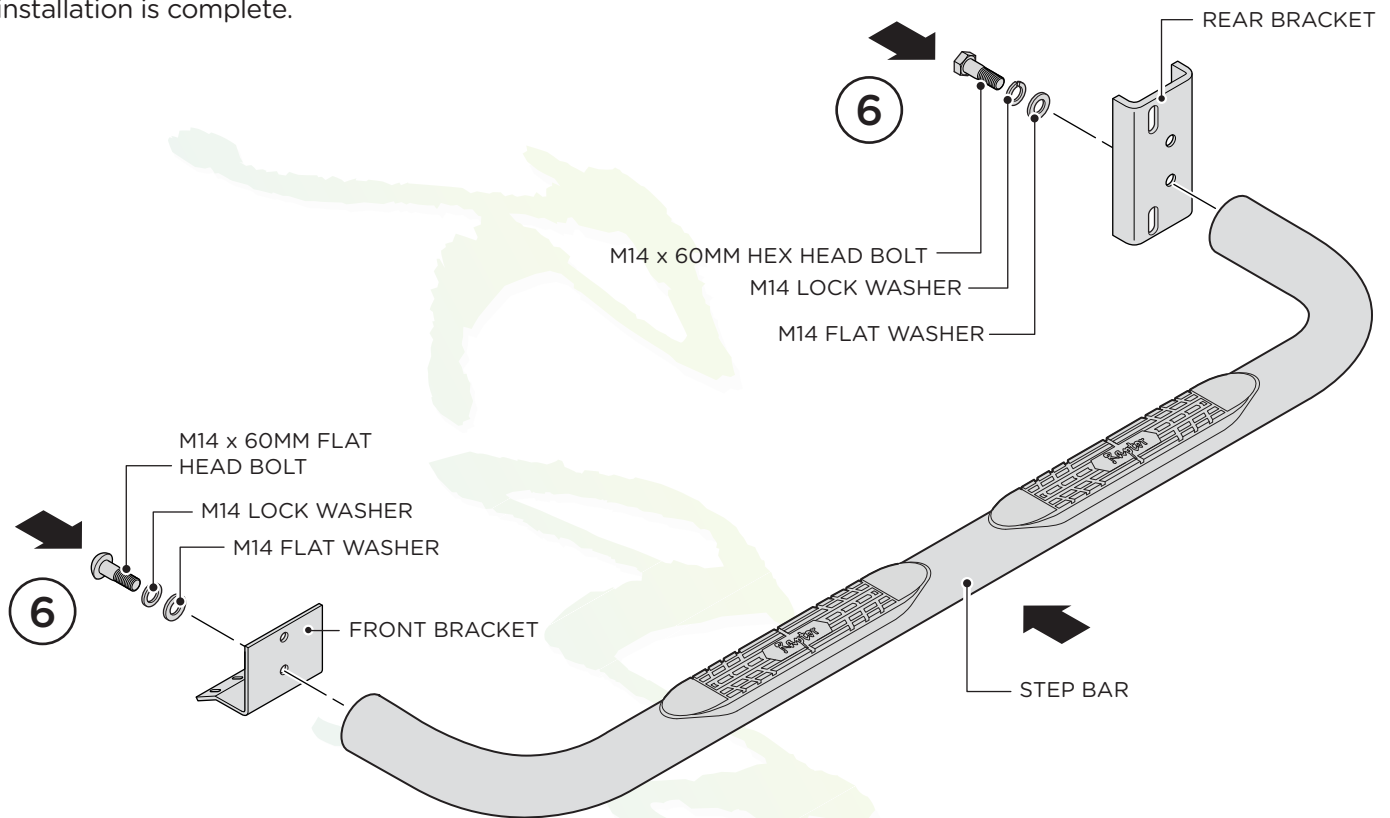

- 7.** Align the attached Brackets to the Bolt Plate and the Mount Bars located at the rear.

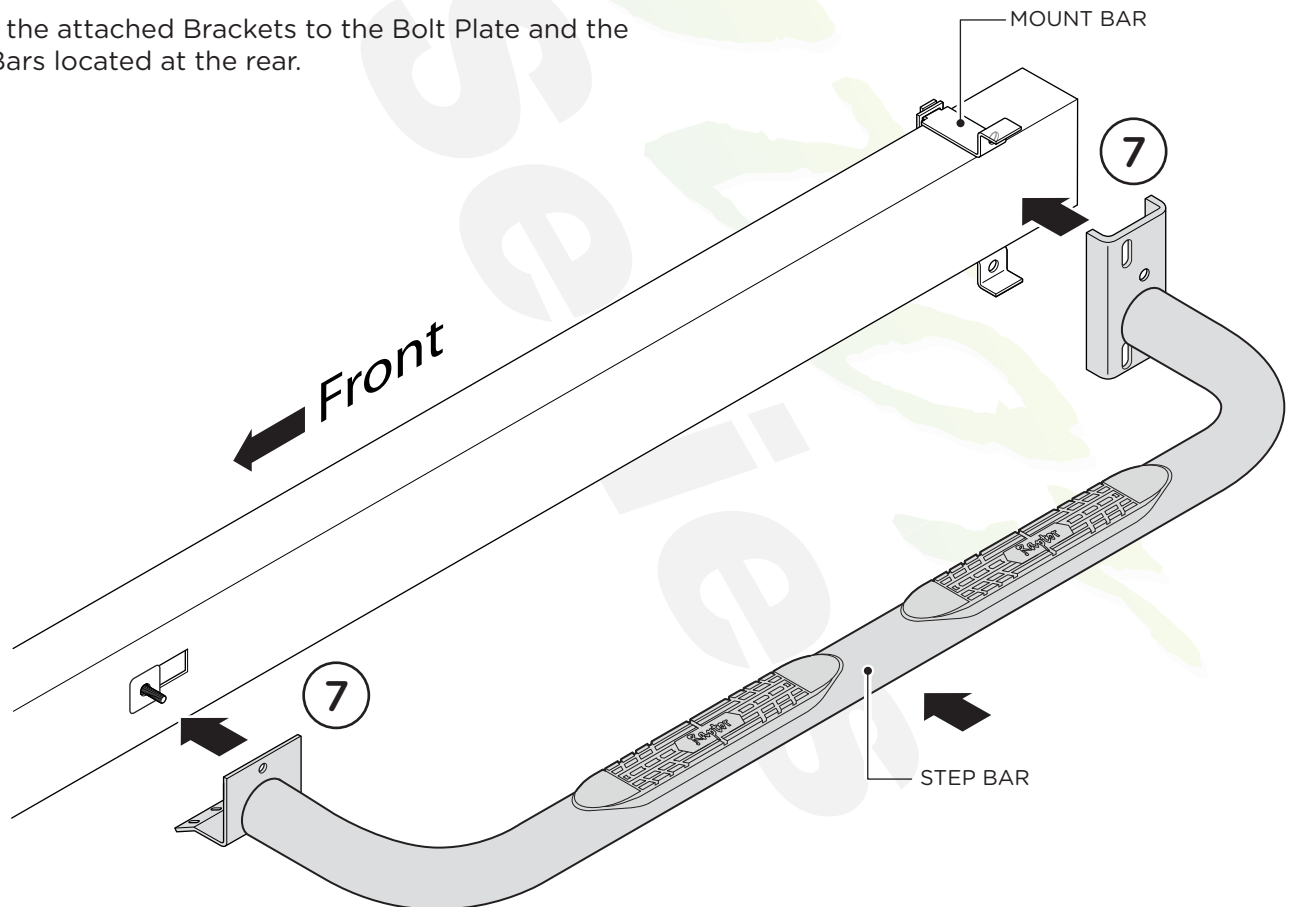



**8.** Attach the Front Bracket to the Bolt Plate using one (1) M12 Hex Head Nut, one (1) M12 Lock Washer and one (1) M12 Flat Washer. Attach the Rear Bracket using two (2) M10 x 50MM Hex Head Bolts, two (2) M10 Lock Washers and two (2) M10 Flat Washers.

Fasten the underside of the Mount Tab Assembly to underside of vehicle frame using one (1) 1/2"-13 X 1.5" Hex Head Bolt, one (1) Flat Head Washer and one (1) 1/2" Lock Washer (8c).

Repeat these steps for passenger side installation. When all hardware is in place, everything must be tightened. See Page 1 for Torque Specifications.

